



AMETA
SOLUTION

Manumastic


70-21

PRODUCT TYPE

Mastic compound made of two components. Epoxy resin.
The universal material repair for all uses, such as: fills in cracks, insulation for pipes and tanks, etc..

TECHNICAL CHARACTERISTICS

- Heat tolerance up to 200°C.
- Pressure resistance up to 800 kp/cm²
- Tensile resistance up to 300 kp/cm²
- Hardening in 3 hours at 20°C.
- Preparation time of 15 minutes. Specific gravity at 2.0
- Shelf life at least 3 years, if kept in closed original container.

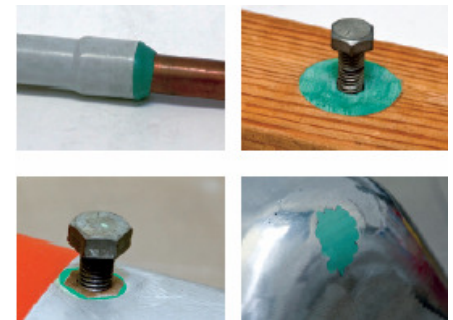

ADVANTAGES AND PROPERTIES

- Works perfectly on metals, wood, stone, ceramics, plastic and glass.
- Easy to use.
- Can be used and applied under water.
- Can be drilled, taped, grinded and saved after hardening.

RECOMMENDATIONS

Follow label instructions.

PACKAGING

Description	Format	Product no.
Paste	100 gr	70-2110
Paste	400 gr	70-2140
Paste	1 kg	70-21/1kg



70-21

Meta-Fill kneadable filler

Heat resistance	up to +200°C
Pressure resistance	7,840 N/cm ² (800 Kp/cm ²)
Tensile strength	2,940 N/cm ² (300 kp/cm ²)
Curing	3 hours at 20°C
Spec. weight	2.0



3556, boul. des Entreprises
Terrebonne (QC) Canada J6X 4J8
1-888-452-6382 – (450) 477-3102
F (450) 477-6664

ametasolution.com