



AMETA
SOLUTION

Titanium Lubricant

70-81 Spray
70-85 Paste

DESCRIPTION

A heavy duty lubricant, titanium based. This product contains no nickel and no aluminium. A must have for maintenance and installation applications. More and more well known manufacturers of high-speed/high-frequency spindles recommends 70-81/85 Metaflux lubricants for tool holders, collet chuck, clamping units and graspers. Reference can be found in the respective operating manuals and service bulletins of the following companies:

DYNOMAX, EMAG MASCHINENFABRIK GmbH, HURON, HSD S.P.A., HSD DEUTSCHLAND, HSD USA, OTT-JAKOB GmbH & CO, SIEMENS, SCHWÄBISCHEN WERKZEUGMASCHINEN, WEISS SPINDEL TECHNOLOGIE GMBH, BIESSE CNC ROUTER


UTILISATIONS

Apply on a preliminarily clean surface.



PROPRIETES ET AVANTAGES

- *Resists temperatures from -180°C to 1350°C
- *Resists pressure up to 2,400 kp/cm²
- *Resistant to water, oil, petrol, sea water, and most acids and alkalis
- *Good resistance to vapors and gas, highly resistant to galvanic corrosion
- *Cannot be rubbed or washed off, extremely low coefficient of friction
- *Special alloyed metal colloidal lubricant.
- *Economical to use

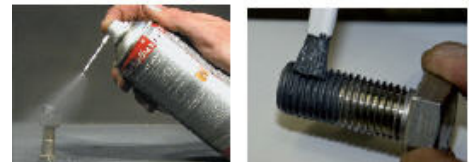

RECOMMENDATIONS

- *Flammable
- *Follow label instruction



TYPES D'EMBALLAGES

Description :	Format :	Product no.
Spray	400ml.	70-81
Paste	4gr.	70-8508
Paste	350gr.	70-8535

3556, boul. des Entreprises
Terrebonne (QC) Canada J6X 4J8
1-888-452-6382 – (450) 477-3102
F (450) 477-6664

ametasolution.com